




MA series multichannel power amplifier

MA series power amplifier, using the latest class D amplifier technology, extremely low distortion, delicate and mellow timbre, high efficiency switch power supply system, powerful driving force, can adapt to various low sensitivity speaker systems.

Very low heating capacity, suitable for customized installation of standard 19 inch cabinet installation size, 2U height, saving valuable space for cabinet installation.


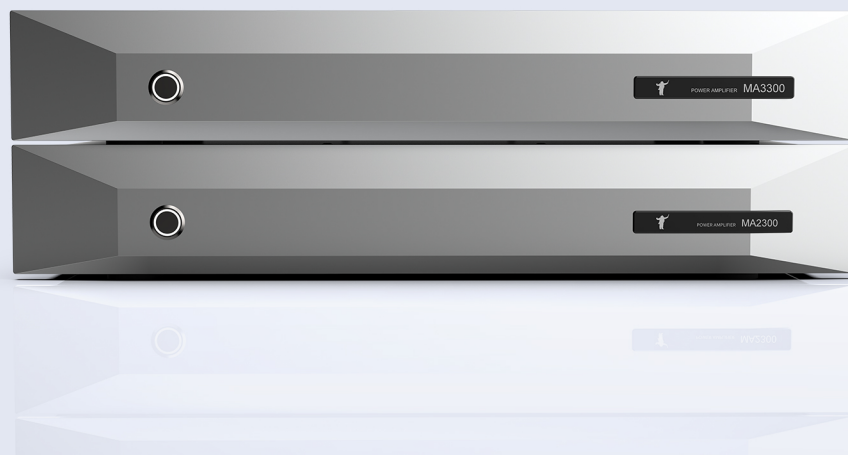


MA2300 Specification


• Frequency	20-20KHz±0.1dB
• Input	RCA、XLR
• Output Power	2×300W/8Ω ; 2×500W/4Ω
• THD	<0.01%@100W
• Singal Noise	>100dB
• Voltage Range	AC 100V~240V , 60/50Hz
• Dimensions	66(H) *430(W)*241(D)mm
• Shipping dimensions	165(H) *515(W)*470(D)mm
• Net weight	5.4Kg /each
• Shipping weight	7.3Kg/CTN

MA3300 Specification

• Frequency	20-20KHz±0.1dB
• Input	RCA、XLR
• Output Power	3×300W/8Ω ; 3×500W/4Ω
• THD	<0.01%@100W
• Singal Noise	>100dB
• Voltage Range	AC 100V~240V , 60/50Hz
• Dimensions	66(H) *430(W)*241(D)mm
• Shipping dimensions	165(H) *515(W)*470(D)mm
• Net weight	5.6Kg /each
• Shipping weight	7.5Kg/CTN

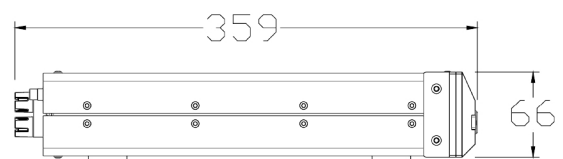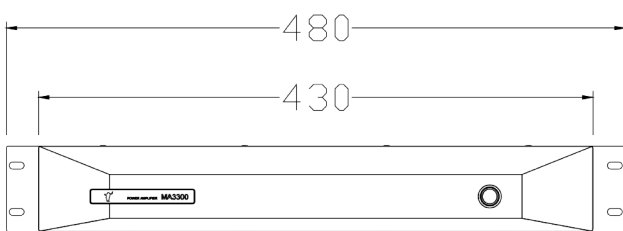

MA-2300

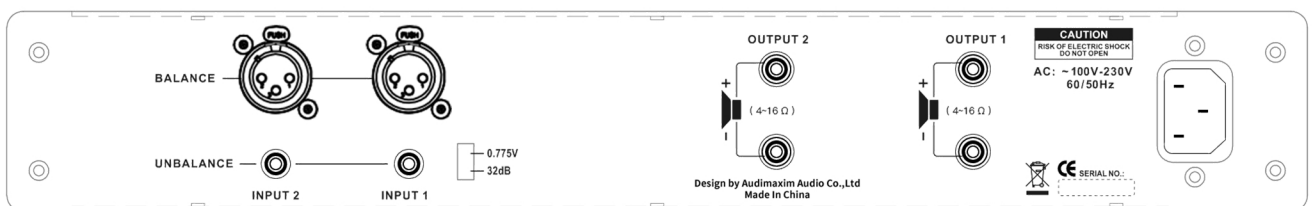

MA-3300

